


You Must select Voltage or it will burn out. We dont use these as there not much good

NOTICE New

RX-Multi
300-868MHz

1. Specifications RX-Multi

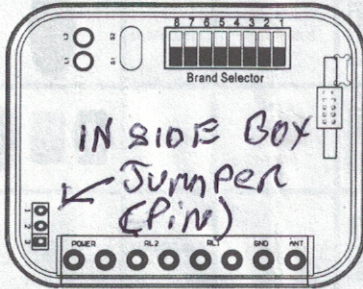

2. Brand selector

With 8 bits dip switch, the user can make difference combination for differents remote brands. The brands selection show as table 1.

3. Learn Button and LED

In RX -Multi receiver, there're 2 independent channels. Each channel has independent learn button S1,S2 and L1,L2.

4. Power Input Selector

The RX-Multi can be worked at the input AC/DC 12V~30V. However, it's better to change the PIS according to the power input. If the input is great than 24V, shorten pin 2&3; shorten 1&2 if input less than 24V.

5. Exchangeable Radio

The memory card can be removed from board for read, copy and backup.

6. How to entry remote and Erase all remote

Entry one button or remote:

1. First, selecting the correct brands for remote will be entry by dip switch;
 2. Press the learn button, the LED turn on. Press the button on the remote, the LED flashes 4 times, this button entry into the R X - Multi successfully.
 3. Repeat step 2 for another button.
- 4.2 channels works at same.

Erase all data in memory card:

Pressing and holding either learn button, the LED start flash. Keep holds pressing this button until the LED turn off. All data in the memory card will be erased permanently.

Notice: Be carefully for erasing all data in the memory card. The data will be erased permanently and cannot be recovered.

Pin 1+2 = 9V → 24 volt only
Pin 2+3 = 24V → 30 volt only

Power is AC/DC BRANDS SELECTION

Item	Selection Dipswitch	Marcas /Brands	Frec.	Observations
1		NICE FLORS	433.92MHz	
2		MARANTEC	433.92MHz	
3		UNIVERSALFIXE CODE/CODIGO FIJO	433.92MHz	CHINA Fixe code
4		FAACSLH Rolling Code	433.92MHz	
5		Liftmaster	433.92MHz	
6		Universal Rolling code	PTX4 433.92MHz	Steel Line SDO800 Stratco Red 433.92MHZ B100 CENTSY5
7		CODIGO FIJO	300.00MHz	frec.300.00MHz

Marantec 270

Merlin +

Short Range Receiver Do Not Use

BRANDS SELECTION

8		CODIGO FIJO	310.00MHz	frec.310.00MHz
9		CODIGO FIJO	315.00MHz	frec.315.00MHz
10		CODIGO FIJO	318.00MHz	frec.318.00MHz
11		CODIGO FIJO	330.00MHz	330.00MHz
12		CODIGO FIJO	390.00MHz	390.00MHz
13		Rollingcode fixe code	315.00MHz	
14		GOJCM	868MHz	
15		Liftmaster RollingCode Billioncode	390.00MHz	

BRANDS SELECTION

16		Liftmaster RollingCode	315.00MHz	
17		Hermann Marantec Berner	868.00MHz	
18		FAACSLH	868.00MHz	
19		Prastel	433.00MHz	
20		Sommer	868.00MHz	
21		Sommer	433,34MHz	
22		Liftmaster RollingCode	868.00MHz	
23		Clemsa Mastercode	433MHz	