

# Boss BHT1 Coding Instructions

---


## Step 1 – erasing the factory code

1. Press and hold the top two buttons (lock and unlock) on your new remote at the same time. The LED light will flash 3 times. Continue holding both buttons.
2. While still holding “lock button”, release the “unlock” button and then press it 3 times. The LED light will flash fast 3 times to indicate that the factory code has successfully been deleted.
3. Release all buttons
4. Test: press a button on the remotes. If the deletion of the factory code has been successful, the LED should not work when you press a button.

**Please note: during the deletion procedure, make sure to keep the “lock” button pressed the whole time.**

## Step 2 – Copying the code from an existing working remote

1. Place your new duplicator remote, and your existing working remote back to back

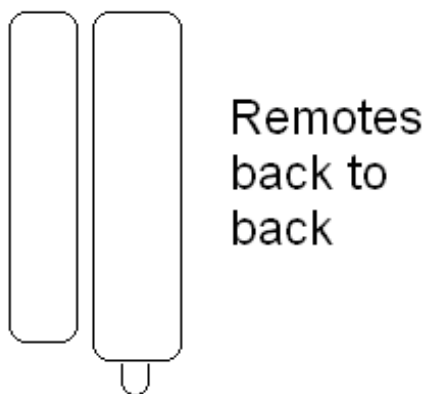

2. Press and **hold** one button on your new duplicator remote. The LED should flash 2 times quickly to indicate that your duplicator remote is in the “learn-code” mode. **Do not release the button.**

3. Press and **hold** a working button on your original remote – this will send out the signal for your duplicator remote to copy. When you see the LED light on your duplicator remote start flashing constantly – then coding has been successful.

4. Release all the buttons on both remotes, and then test your new remote to make sure that it is working.

**Please note: the coding process should take 5-20 seconds.  
Repeat steps 1-4 to code additional buttons**

**TIPS:**

**A:** It is necessary to erase the code on your new remote before you start the copying phase new remote before the copy procedure

**B.** Try other positions such as head to head or side by side if coding fails during “step 2”. This sometimes happens, as the antenna on your existing remote that transmits the remote signal does not reach far enough for your new remote to pick it up



**C.** If everything fails, change the battery in both your existing and new remote, and then repeat from step 1.

How to restore an accidentally erased remote control

Press and hold the bottom two buttons on your new remote for 5 seconds