



HOME ENTRY EARLY MODEL

It sets up the same as a Napoleon

1. Opening & closing force self-learning

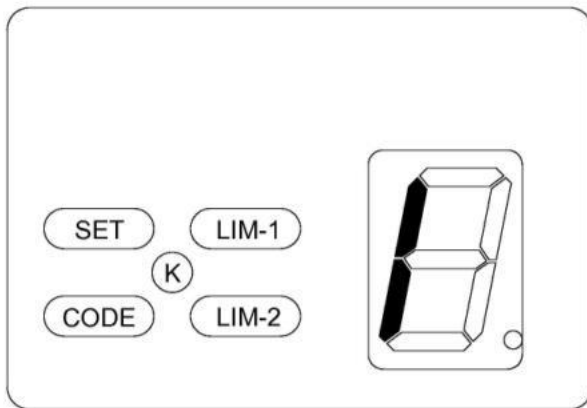

Press „SET“ button and hold on until the LED displays figure „1“, then adjust the up limit by pressing „LIM-1“ button. Fine-tuning „LIM-1“(up) or „LIM-2“(down) button to determine the final up limit position then press „set“ button the display turn into „2“ automatically. Adjust the down limit by pressing „LIM-2“ button. Fine-tuning „LIM-1“(up) or „LIM-2“(down) button to determine the final down limit position then press „set“ button. The opener will operate a cycle automatically to remember the limit positions and the opening & closing force.

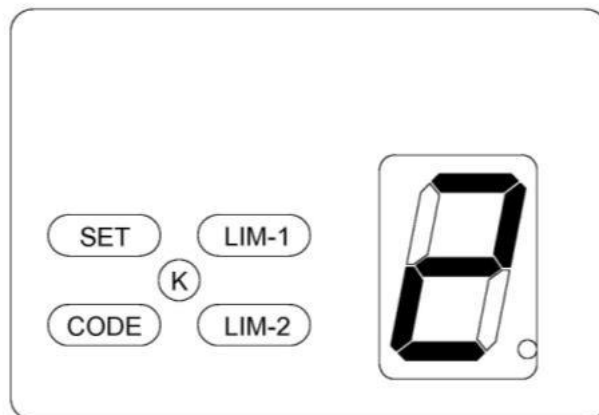

2. Matching the receiver and transmitter

Press „CODE“ button and hold on until the LED dot is on. (Fig. A) Then press any button on the transmitter once, the dot will be off; press the button again the dot will fast flash then LED displays „11“ (Fig. B). After that the transmitter will be available.

Press „CODE“ button more than 8 seconds until the LED displays „C“, all the stored codes will be deleted.

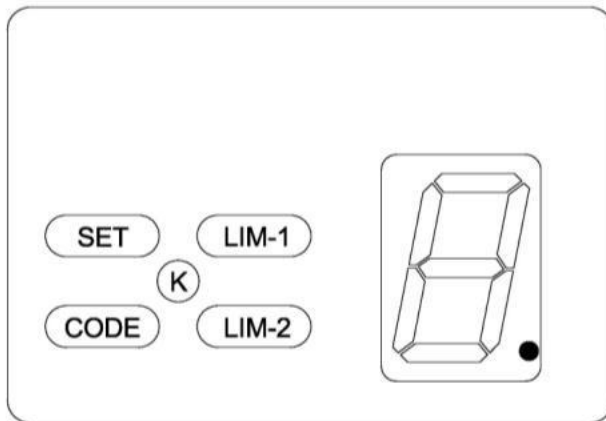


Fig. A


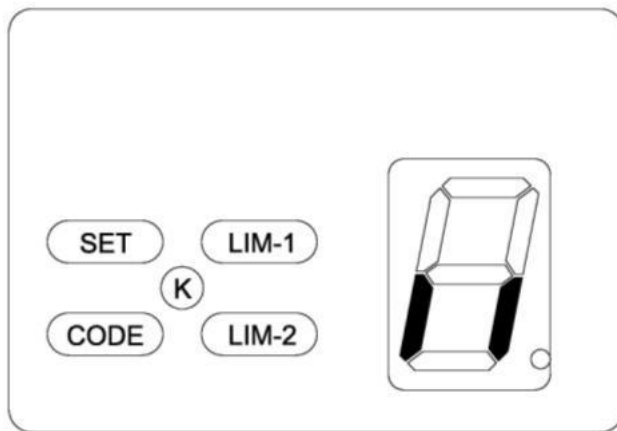


Fig. B

8

3. Safety reverse force adjustment

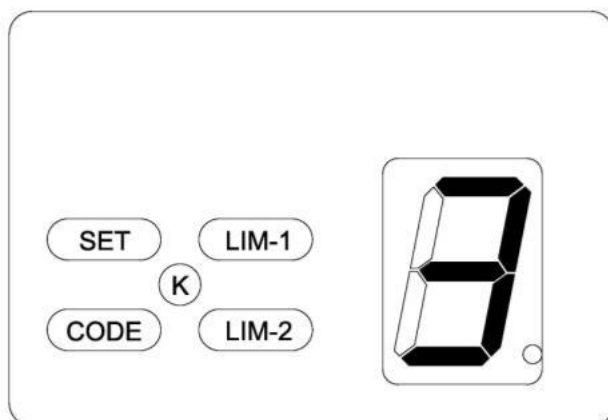

Press „SET“ button and hold on until the LED displays „3“. It's under force adjustment mode. Press „LIM-1“ button to increase the force and „LIM-2“ button to decrease the force. The maximum force is 9 and the minimum is 1. Press „SET“ button to confirm.

HOME ENTRY EARLY MODEL

